



X band frequency synthesizer

- 1Hz frequency step
- Low phase noise
- 3 wire serial frequency control

Option

- RS232
- Single DC Supply Operation
- Other frequency on request

Typical Performance Specifications

Electrical specifications		Unit
Frequency Range	11.7 -11.9	GHz
Bandwith	200	MHz
Step size (from 10 kHz-consult factory)	1	Hz
Output Power	10	dBm
Output Power Flatness	1.2 (max)	dB
Phase Noise@10KHz	-81	dBc/Hz
Spurious (offset >50 KHz)	<-65	dBc typ
Harmonics	<-30	dBc typ
External Reference (3dBm typ.)	10	MHz
Frequency Accuracy	same as reference	
Frequency Control	3 wire serial TTL	(enable,clock, data)
Alarm	high level TTL=locked	
Supply Voltage	12+/-0.5	V
Typical Current	630	mA
Mecanical specifications		
Size (MEC069-B rev A)	120 x 85 x 29	mm
Connector RF et REF	SMA femelle	
Control	2mm connector	
Environnement		
Operating temperature	-20 à +70	°C
Storing temperature	-40 à +80	°C


Programming frequency synthesizer model AMG045-002

Frequency control : serial 3 wire TTL binary : Strobe/Clock/Data (= Freq Num)

$$F_{out} = F_{low} + (Freq\ Num \times Step\ size)$$

Tcs	50µs mini
Tch	50µs mini
Tcwh	50µs mini
Tcwl	50µs mini
Tes	50µs mini
Tw	1000µs mini

Serial data input timing

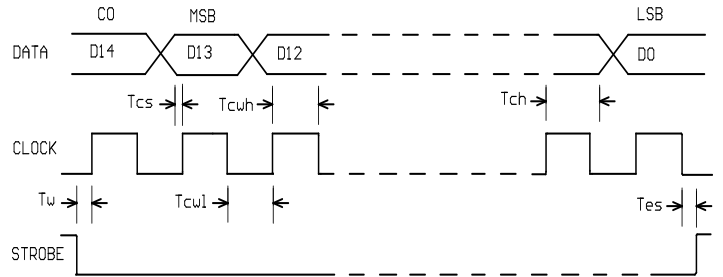

Serial data format


Output Frequency	Number	C	MSB												LSB	
		14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
8400.000 MHz	3200	0	0	0	1	1	0	0	1	0	0	0	0	0	0	0
8400.125 MHz	3201	0	0	0	1	1	0	0	1	0	0	0	0	0	0	1
10000.000 MHz	16000	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0

Control bit 0 = do not save as power up frequency

Control bit 1 = save as power up frequency

Data is shifted MSB first

Outline Drawing

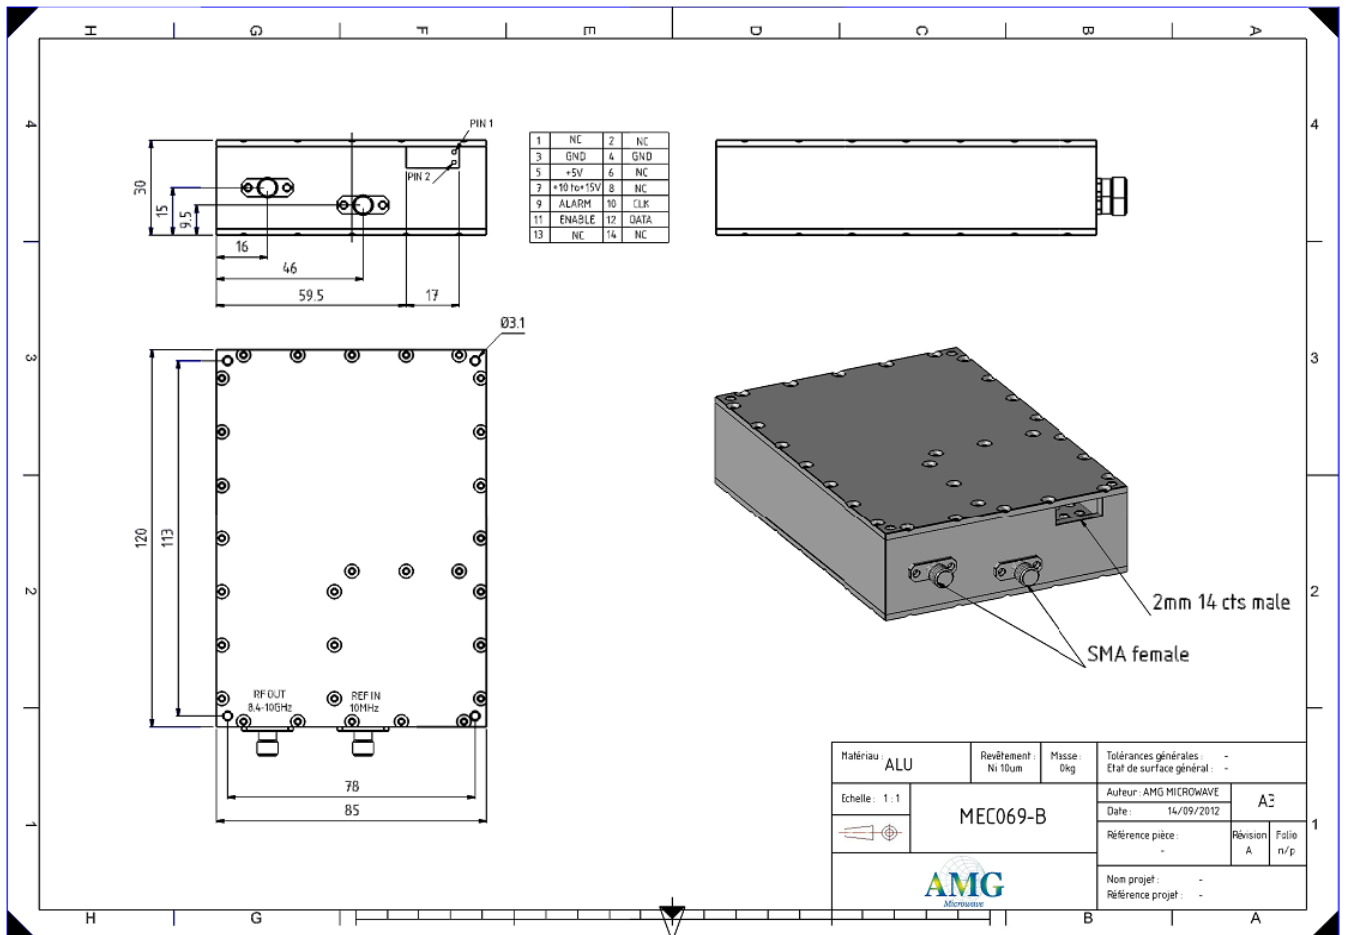

DISCLAIMER :

Different technical specifications are possible upon request, AMG reserves the right to make modifications to the design and characteristic of the product at any times and without prior notice